

VALVOLE OLEODINAMICHE

HYDRAULIC VALVES


HYDRAULIKVENTILE

VALVOLA UNIDIREZIONALE

CHECK VALVE - RÜCKSCHLAGVENTIL

VUI

CODICE Code Bestell-Nr.	Filetto Thread Gewinde	Q Max l/min.	P Max bar	OPEN PRESS.	TIPO Type Typ	Kg.	EURO
TENUTA A SFERA - BALL TYPE - KUGELSPERRUNG							
VCG301.100000	1/4"	18	350	0,5	VUI 010	1,00	11,19
VCG301.200000	3/8"	25	350	0,5	VUI 020	2,00	11,53
VCG301.300000	1/2"	50	350	0,5	VUI 030	4,00	12,53
VCG301.400000	3/4"	78	350	0,5	VUI 040	7,00	14,86



ACCIAIO - STEEL - STAHL



CARTUCCIA - CARTRIDGE - PATRONE

VALVOLA UNIDIREZIONALE

CHECK VALVE - RÜCKSCHLAGVENTIL

VUR

CODICE Code Bestell-Nr.	Filetto Thread Gewinde	Q Max l/min.	P Max bar	OPEN PRESS.	TIPO Type Typ	Kg.	EURO
TENUTA A CONO - POPPET TYPE - KEGELSPERRUNG							
VSG303.C10000	1/4"	25	400	0,5	VUR 010-C	0,10	8,95
VSG303.C20000	3/8"	40	400	0,5	VUR 020-C	0,18	10,65
VSG303.C30000	1/2"	80	350	0,5	VUR 030-C	0,31	13,15
VSG303.C40000	3/4"	110	300	0,5	VUR 040-C	0,56	21,64
VSG303.C50000	1"	140	270	0,5	VUR 050-C	0,91	31,96
VSG303.C60000	1.1/4"	200	250	0,5	VUR 060-C	1,48	53,19
VSG303.C70000	1.1/2"	300	200	0,5	VUR 070-C	2,37	71,50



Press. di apertura - Opening pressure - Öffnungsdruck: bar 0,5 (standard) - 4 - 8

ACCIAIO - STEEL - STAHL

MONTAGGIO IN LINEA
LINE MOUNTING - REIHENMONTAGE


VALVOLA DI BLOCCO PILOTATA

PILOT OPERATED CHECK VALVE - VORGESTEUEERTES SPERRVENTIL

VRDE...CIL

CODICE Code Bestell-Nr.	Filetto Thread Gewinde	Q Max l/min.	P Max bar	PILOT RATIO	TIPO Type Typ	Kg.	EURO
TENUTA A CONO - POPPET TYPE - KEGELSPERRUNG							
VSG326.B10450	1/4"	20	300	1:4,5	VRDE 010 CIL	0,62	46,98
VSG326.B20490	3/8"	20	300	1:4,9	VRDE 020 CIL	0,57	46,98

Press. di apertura - Opening pressure - Öffnungsdruck: bar 0,6



ACCIAIO - STEEL - STAHL

DOPPIO EFFETTO - DOUBLE ACTING - DOPPELWIRKEND
MONTAGGIO SU CILINDRO - CYLINDER MOUNTING -
MONTAGE AM ZYLINDER


VALVOLA DI BLOCCO PILOTATA

PILOT OPERATED CHECK VALVE - VORGESTEUEERTES SPERRVENTIL

VRSE-F...FF

CODICE Code Bestell-Nr.	Filetto Thread Gewinde	Q Max l/min.	P Max bar	PILOT RATIO	TIPO Type Typ	Kg.	EURO
TENUTA A CONO - POPPET TYPE - KEGELSPERRUNG							
VSG311.F10454	1/4"	30	350	1:4,5	VRSE-F 010 FF	0,68	25,84
VSG311.F15454	3/8"	30	350	1:4,5	VRSE-F 015 FF	0,63	25,84
VSG311.F20404	3/8"	50	350	1:4	VRSE-F 020 FF	0,97	44,78
VSG311.F25404	1/2"	50	300	1:4	VRSE-F 025 FF	0,90	44,78
VSG311.F30404	1/2"	80	300	1:4	VRSE-F 030 FF	1,69	63,09
VSG311.F40404	3/4"	120	300	1:4	VRSE-F 040 FF	3,06	110,49

Press. di apertura - Opening pressure - Öffnungsdruck: bar 0,5 - 4 (standard) - 8



ACCIAIO - STEEL - STAHL



SEMPLICE EFFETTO - SINGLE ACTING - EINFACHWIRKEND
MONTAGGIO SU CILINDRO
CYLINDER MOUNTING - MONTAGE AM ZYLINDER

VALVOLE OLEODINAMICHE
HYDRAULIC VALVES
HYDRAULIKVENTILE

VALVOLA DI BLOCCO PILOTATA
PILOT OPERATED CHECK VALVE
VORGESTEUERTES SPERRVENTIL

VRDE-F...FF

CODICE Code Bestell-Nr.	Filetto Thread Gewinde	Q Max l/min.	P Max bar	PILOT RATIO	TIPO Type Typ	Kg.	EURO
TENUTA A CONO - POPPET TYPE - KEGELSPERRUNG							
VSG312.F10454	1/4"	30	350	1:4,5	VRDE-F 010 FF	0,69	27,01
VSG312.F15454	3/8"	30	350	1:4,5	VRDE-F 015 FF	0,64	27,01
VSG312.F20404	3/8"	50	350	1:4	VRDE-F 020 FF	0,98	49,11
VSG312.F25404	1/2"	50	300	1:4	VRDE-F 025 FF	0,91	49,11
VSG312.F30404	1/2"	80	300	1:4	VRDE-F 030 FF	1,72	67,33
VSG312.F40404	3/4"	120	300	1:4	VRDE-F 040 FF	3,11	114,15
Press. di apertura - <i>Opening pressure</i> - <i>Öffnungsdruck</i> : bar 0,5 - 4 (standard) - 8							

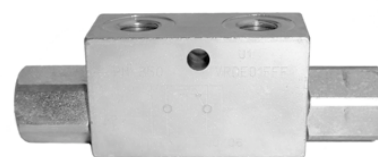



DOPPIO EFFETTO
DOUBLE ACTING - DOPPELWIRKEND
MONTAGGIO SU CILINDRO
CYLINDER MOUNTING - MONTAGE AM ZYLINDER

ACCIAIO - STEEL - STAHL

VALVOLA DI BLOCCO PILOTATA
PILOT OPERATED CHECK VALVE
VORGESTEUERTES SPERRVENTIL

VRSE-AZ...FF
(DIN2353)

CODICE Code Bestell-Nr.	Filetto Thread Gewinde	Q Max l/min.	P Max bar	PILOT RATIO	TIPO Type Typ	Kg.	EURO
TENUTA A CONO - POPPET TYPE - KEGELSPERRUNG							
VSG321.F10454	1/4"	30	350	1:4,5	VRSE-AZ 010 FF-T12	0,62	26,63
VSG321.F15454	3/8"	30	350	1:4,5	VRSE-AZ 015 FF-T12	0,59	25,84
VSG321.F20404	3/8"	50	350	1:4	VRSE-AZ 020 FF-T15	0,89	44,57
VSG321.F25404	1/2"	50	300	1:4	VRSE-AZ 025 FF-T15	0,85	44,78
VSG321.F30404	1/2"	80	300	1:4	VRSE-AZ 030 FF-T18	1,57	62,80
Press. di apertura - <i>Opening pressure</i> - <i>Öffnungsdruck</i> : bar 0,5 - 4 (standard) - 8 SENZA DADO E ANELLO DI SERRAGGIO <i>WITHOUT NUT AND CUTTING RING</i> ÖHNE ÜBERWURFMUTTERN UND SCHNEIDRINGE							

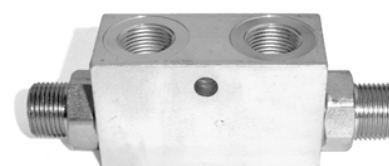

SEMPLICE EFFETTO
SINGLE ACTING - EINFACHWIRKEND
MONTAGGIO SU CILINDRO
CYLINDER MOUNTING - MONTAGE AM ZYLINDER



ACCESSORI VEDI PAG. - *ACCESSORIES SEE PAGE* - *ZUBEHÖRESIEHE SEITE*: 66-74-75

ACCIAIO - STEEL - STAHL

VALVOLA DI BLOCCO PILOTATA
PILOT OPERATED CHECK VALVE
VORGESTEUERTES SPERRVENTIL

VRDE-AZ...FF
(DIN2353)

CODICE Code Bestell-Nr.	Filetto Thread Gewinde	Q Max l/min.	P Max bar	PILOT RATIO	TIPO Type Typ	Kg.	EURO
TENUTA A CONO - POPPET TYPE - KEGELSPERRUNG							
VSG322.F10454	1/4"	30	350	1:4,5	VRDE-AZ 010 FF-T12	0,62	27,01
VSG322.F15454	3/8"	30	350	1:4,5	VRDE-AZ 015 FF-T12	0,60	25,96
VSG322.F20404	3/8"	50	350	1:4	VRDE-AZ 020 FF-T15	0,90	49,11
VSG322.F25404	1/2"	50	300	1:4	VRDE-AZ 025 FF-T15	0,86	49,11
VSG322.F30404	1/2"	80	300	1:4	VRDE-AZ 030 FF-T18	1,58	67,00
Press. di apertura - <i>Opening pressure</i> - <i>Öffnungsdruck</i> : bar 0,5 - 4 (standard) - 8 SENZA DADO E ANELLO DI SERRAGGIO <i>WITHOUT NUT AND CUTTING RING</i> ÖHNE ÜBERWURFMUTTERN UND SCHNEIDRINGE							

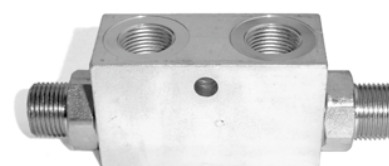

DOPPIO EFFETTO
DOUBLE ACTING - DOPPELWIRKEND
MONTAGGIO SU CILINDRO
CYLINDER MOUNTING - MONTAGE AM ZYLINDER

ACCESSORI VEDI PAG. - *ACCESSORIES SEE PAGE* - *ZUBEHÖRE SIEHE SEITE*: 66-74-75

ACCIAIO - STEEL - STAHL

VALVOLE OLEODINAMICHE

HYDRAULIC VALVES


HYDRAULIKVENTILE

VALVOLA DI BLOCCO PILOTATA

PILOT OPERATED CHECK VALVE - VORGESTEUERTES SPERRVENTIL

VRPSE + BY PASS

CODICE Code Bestell-Nr.	Filetto Thread Gewinde	Q Max l/min.	P Max bar	PILOT RATIO	TIPO Type Typ	Kg.	EURO
TENUTA A CONO - POPPET TYPE - KEGELSPERRUNG							
Versione sinistra - Left version - Linke Version							
VSG331.104504	1/4"	25	350	1:4,5	VRPSE 010-FL	0,95	47,40
VSG331.154504	3/8"	25	350	1:4,5	VRPSE 015-FL	0,95	47,40
Versione destra - Right version - Rechte Version							
VSG332.104504	1/4"	25	350	1:4,5	VRPSE 010-FR	0,95	47,40
VSG332.154504	3/8"	25	350	1:4,5	VRPSE 015-FR	0,95	47,40
Press. di apertura - Opening pressure - Öffnungsdruck: bar 0,5 - 4 (standard) - 8							



SEMPLICE EFFETTO - SINGLE ACTING - EINFACHWIRKEND
MONTAGGIO SU CILINDRO
CYLINDER MOUNTING - MONTAGE AM ZYLINDER


ACCIAIO - STEEL - STAHL

VALVOLA DI BLOCCO PILOTATA

PILOT OPERATED CHECK VALVE - VORGESTEUERTES SPERRVENTIL

VBPS

CODICE Code Bestell-Nr.	Filetto Thread Gewinde	Q Max l/min.	P Max bar	PILOT RATIO	TIPO Type Typ	Kg.	EURO
TENUTA A SFERA - BALL TYPE - KUGELSPERRUNG							
VSG341.109500	1/4"	15	320	1:9,5	VBPS 010	0,70	38,54
VSG341.206000	3/8"	35	320	1:6	VBPS 020	0,92	41,57
VSG341.304300	1/2"	45	300	1:4,3	VBPS 030	1,07	48,69
VSG341.404000	3/4"	80	250	1:4	VBPS 040	2,30	72,37
VSG341.503500	1"	120	220	1:3,5	VBPS 050	2,36	79,69
Press. di apertura - Opening pressure - Öffnungsdruck: Bar 0,5 (standard) - 4 - 8							



SEMPLICE EFFETTO - SINGLE ACTING - EINFACHWIRKEND
MONTAGGIO IN LINEA
LINE MOUNTING - REIHENMONTAGE



ACCIAIO - STEEL - STAHL

VALVOLA DI BLOCCO PILOTATA

PILOT OPERATED CHECK VALVE - VORGESTEUERTES SPERRVENTIL

VPDE

CODICE Code Bestell-Nr.	Filetto Thread Gewinde	Q Max l/min.	P Max bar	PILOT RATIO	TIPO Type Typ	Kg.	EURO
TENUTA A CONO - POPPET TYPE - KEGELSPERRUNG							
VSG352.104004	1/4"	20	350	1:4	VPDE 010	0,79	50,40
VSG352.154004	3/8"	20	350	1:4	VPDE 015	0,79	50,40
VAG352.207004	3/8"	40	350	1:7	VPDE 020	0,63	56,02
VAG352.257004	1/2"	40	350	1:7	VPDE 025	0,60	56,02
Press. di apertura - Opening pressure - Öffnungsdruck: bar 0,5 - 4 (standard) - 8							



DOPPIO EFFETTO
DOUBLE ACTING - DOPPELWIRKEND
MONTAGGIO IN LINEA
LINE MOUNTING - REIHENMONTAGE



VPDE 010 - 015: ACCIAIO - STEEL - STAHL VPDE 020 - 025: ALLUMINIO - ALUMINIUM

VALVOLA DI BLOCCO PILOTATA

PILOT OPERATED CHECK VALVE - VORGESTEUERTES SPERRVENTIL

VPDE/F

CODICE Code Bestell-Nr.	Filetto Thread Gewinde	Q Max l/min.	P Max bar	PILOT RATIO	TIPO Type Typ	Kg.	EURO
TENUTA A CONO - POPPET TYPE - KEGELSPERRUNG							
VAG353.104004	1/4"	20	350	1:4	VPDE-F 010	0,43	51,69
VAG353.154004	3/8"	20	350	1:4	VPDE-F 015	0,43	51,69
VAG353.207004	3/8"	40	350	1:7	VPDE-F 020	0,60	56,02
VAG353.257004	1/2"	40	350	1:7	VPDE-F 025	0,60	56,02
Press. di apertura - Opening pressure - Öffnungsdruck: bar 0,5 - 4 (standard) - 8							



DOPPIO EFFETTO
DOUBLE ACTING - DOPPELWIRKEND
FLANGIABILE
FACE MOUNTING - PLATTENANSCHLUSS

ALLUMINIO - ALUMINIUM